



EASYMOUNT WIDE FORMAT SYSTEMS



Code	Maximum Film Width	Sign	Cold	Single Hot	Double Hot	SHW
EM-1200	1200mm	-	C	SH	DH	-
EM-1400	1400mm	S	C	SH	-	-
EM-1600	1600mm	S	C	SH	-	SHW *
EM-1650	1650mm	-	-	-	DH	-
EM-2100	2100mm	-	-	SH	-	-

* Independent heated rollers. Model not suitable for encapsulation.

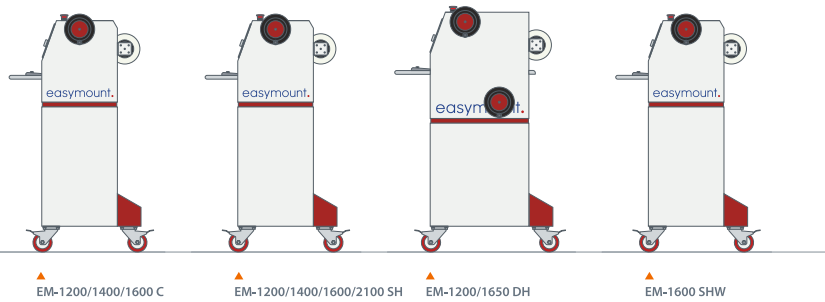

Specifications

	Cold 1200/1400/1600	Single Hot 1200/1400/1600/2100	Double Hot 1200/1650	SHW 1600
Laminating Speed (m/min)	6	6	3.9	6
Max Width (mm)	1200/1400/1600	1200/1400/1600/2100	1200/1650	1600
Mounting Thickness (mm)	25	25	25	25
Roller Diameter (mm)	112/112/130	112/112/130/130	112/130	130
Warm-up Time (mins)	-	10	15	15
Hot Roller Heater System	-	Internal Infrared	Int. Infrared	Int. Infrared
Laminating Temperature Range (°C)	-	0-60	0-130	0-130
Control Panel	Digital	Digital	Digital	Digital
Pressure Adjustment	Manual/Gauge	Manual/Gauge	Man./Gauge	Man./Gauge
Film Core (mm)	77	77	77	77
Power Supply AC (V)	220/240	220/240	220/240	220/240
Power Supply Required (Amps)	13	13	32	32
Power Consumption (W)	50	970/1310/1500/1800	3950/5150	5000
Overall Dimensions - Width (mm)	1790/1990/2190	1790/1990/2190/2650	1700/2170	1990
Overall Dimensions - Depth x Height (mm)	650x1255	650x1255	785x1255	650x1255
Gross Machine Weight (Kg)	185/210/245	185/210/245/280	270/365	205
Warranty	1 year	1 year	1 year	1 year



Accessories

	Sign	Cold	Single Hot	Double Hot	SHW
Additional Mandrels	-	•	•	•	•
Take-up Unit	-	•	•	•	•
Dust Cover	-	S	S	S	S

• Yes - No S Standard